

# B.

# Terranova

Rooted in the raw beauty of South African landscapes, Terranova brings calm and balance to heavy commercial interiors. This elegant tufted tile range softens sound, adds layered texture, and connects people to place.

## Technical Specifications to EN 1307

Construction:	(ISO 2424)	Tufted Hi Low Infinity Loop Pile
Fibre Type:	(ISO 2424)	100% Stainproof SDX (Solution Dyed Nylon)
Primary Backing	(ISO 2424)	Nonwoven Polyester
Secondary Backing	(ISO 2424)	ProBac - Polyester Felt
Fibre Mass:	(ISO 8543)	±660g/m <sup>2</sup>   19.50oz/yd <sup>2</sup>
Total Thickness:	(ISO 1765))	±7.7 - 8.8mm   0.303 inch - 0.346 inch
Total Mass:	(ISO 8543)	±2666g/m <sup>2</sup>   78.63oz/yd <sup>2</sup>
Effective Pile Mass:	(ISO 8543)	±409g/m <sup>2</sup>   12oz/yd <sup>2</sup>
Pile Density:	(ISO 8543)	±0.091 - 0.120g/cm <sup>3</sup>   2452oz/yd <sup>3</sup> - 3236oz/yd <sup>3</sup>
Number of Tufts:	(ISO 1765))	±216000m <sup>2</sup>   258333.85/yd <sup>2</sup>
Standard Dimension:	(EN ISO24342)	50cm x 50cm   19.69 inch x 19.69 inch
Use Classification:	(EN 1307)	33 - Heavy Commercial
Fire Classification:	(EN 13501/ASTM R 648-08)	Bfls1   Class 1




# B.

## Terranova


Colour Fastness:		
Light:	(NF EN ISO 105-B02)	>6.0
Water:	(ISO 105-E01)	4-5
Rubbing (Dry):	(ISO 105-X12)	4-5
Rubbing (Wet):	(ISO 105-X12)	4-5
Electrostatic Propensity:	(ISO 6356)	≤2.0 kV
Sound Absorption:	(EN ISO 354)	aw: 0.25
Sound Insulation:	(EN ISO 10140)	Δ Lw 27db
Thermal Resistance:	(ISO 8302)	0.1283m <sup>2</sup> K/W
Dimensional Stability:	(ISO 986)	Shrinkage ≤0.4% /Extension ≤0.2% in both directions
VOC Test:	(ISO 10580/ASTM D5116)	Passed
Castor Chair Suitability:	(NF EN 985)	A: Intensive Use
Staircase Suitability:	(NF EN ISO 12951)	B: Occasional Use



# B.

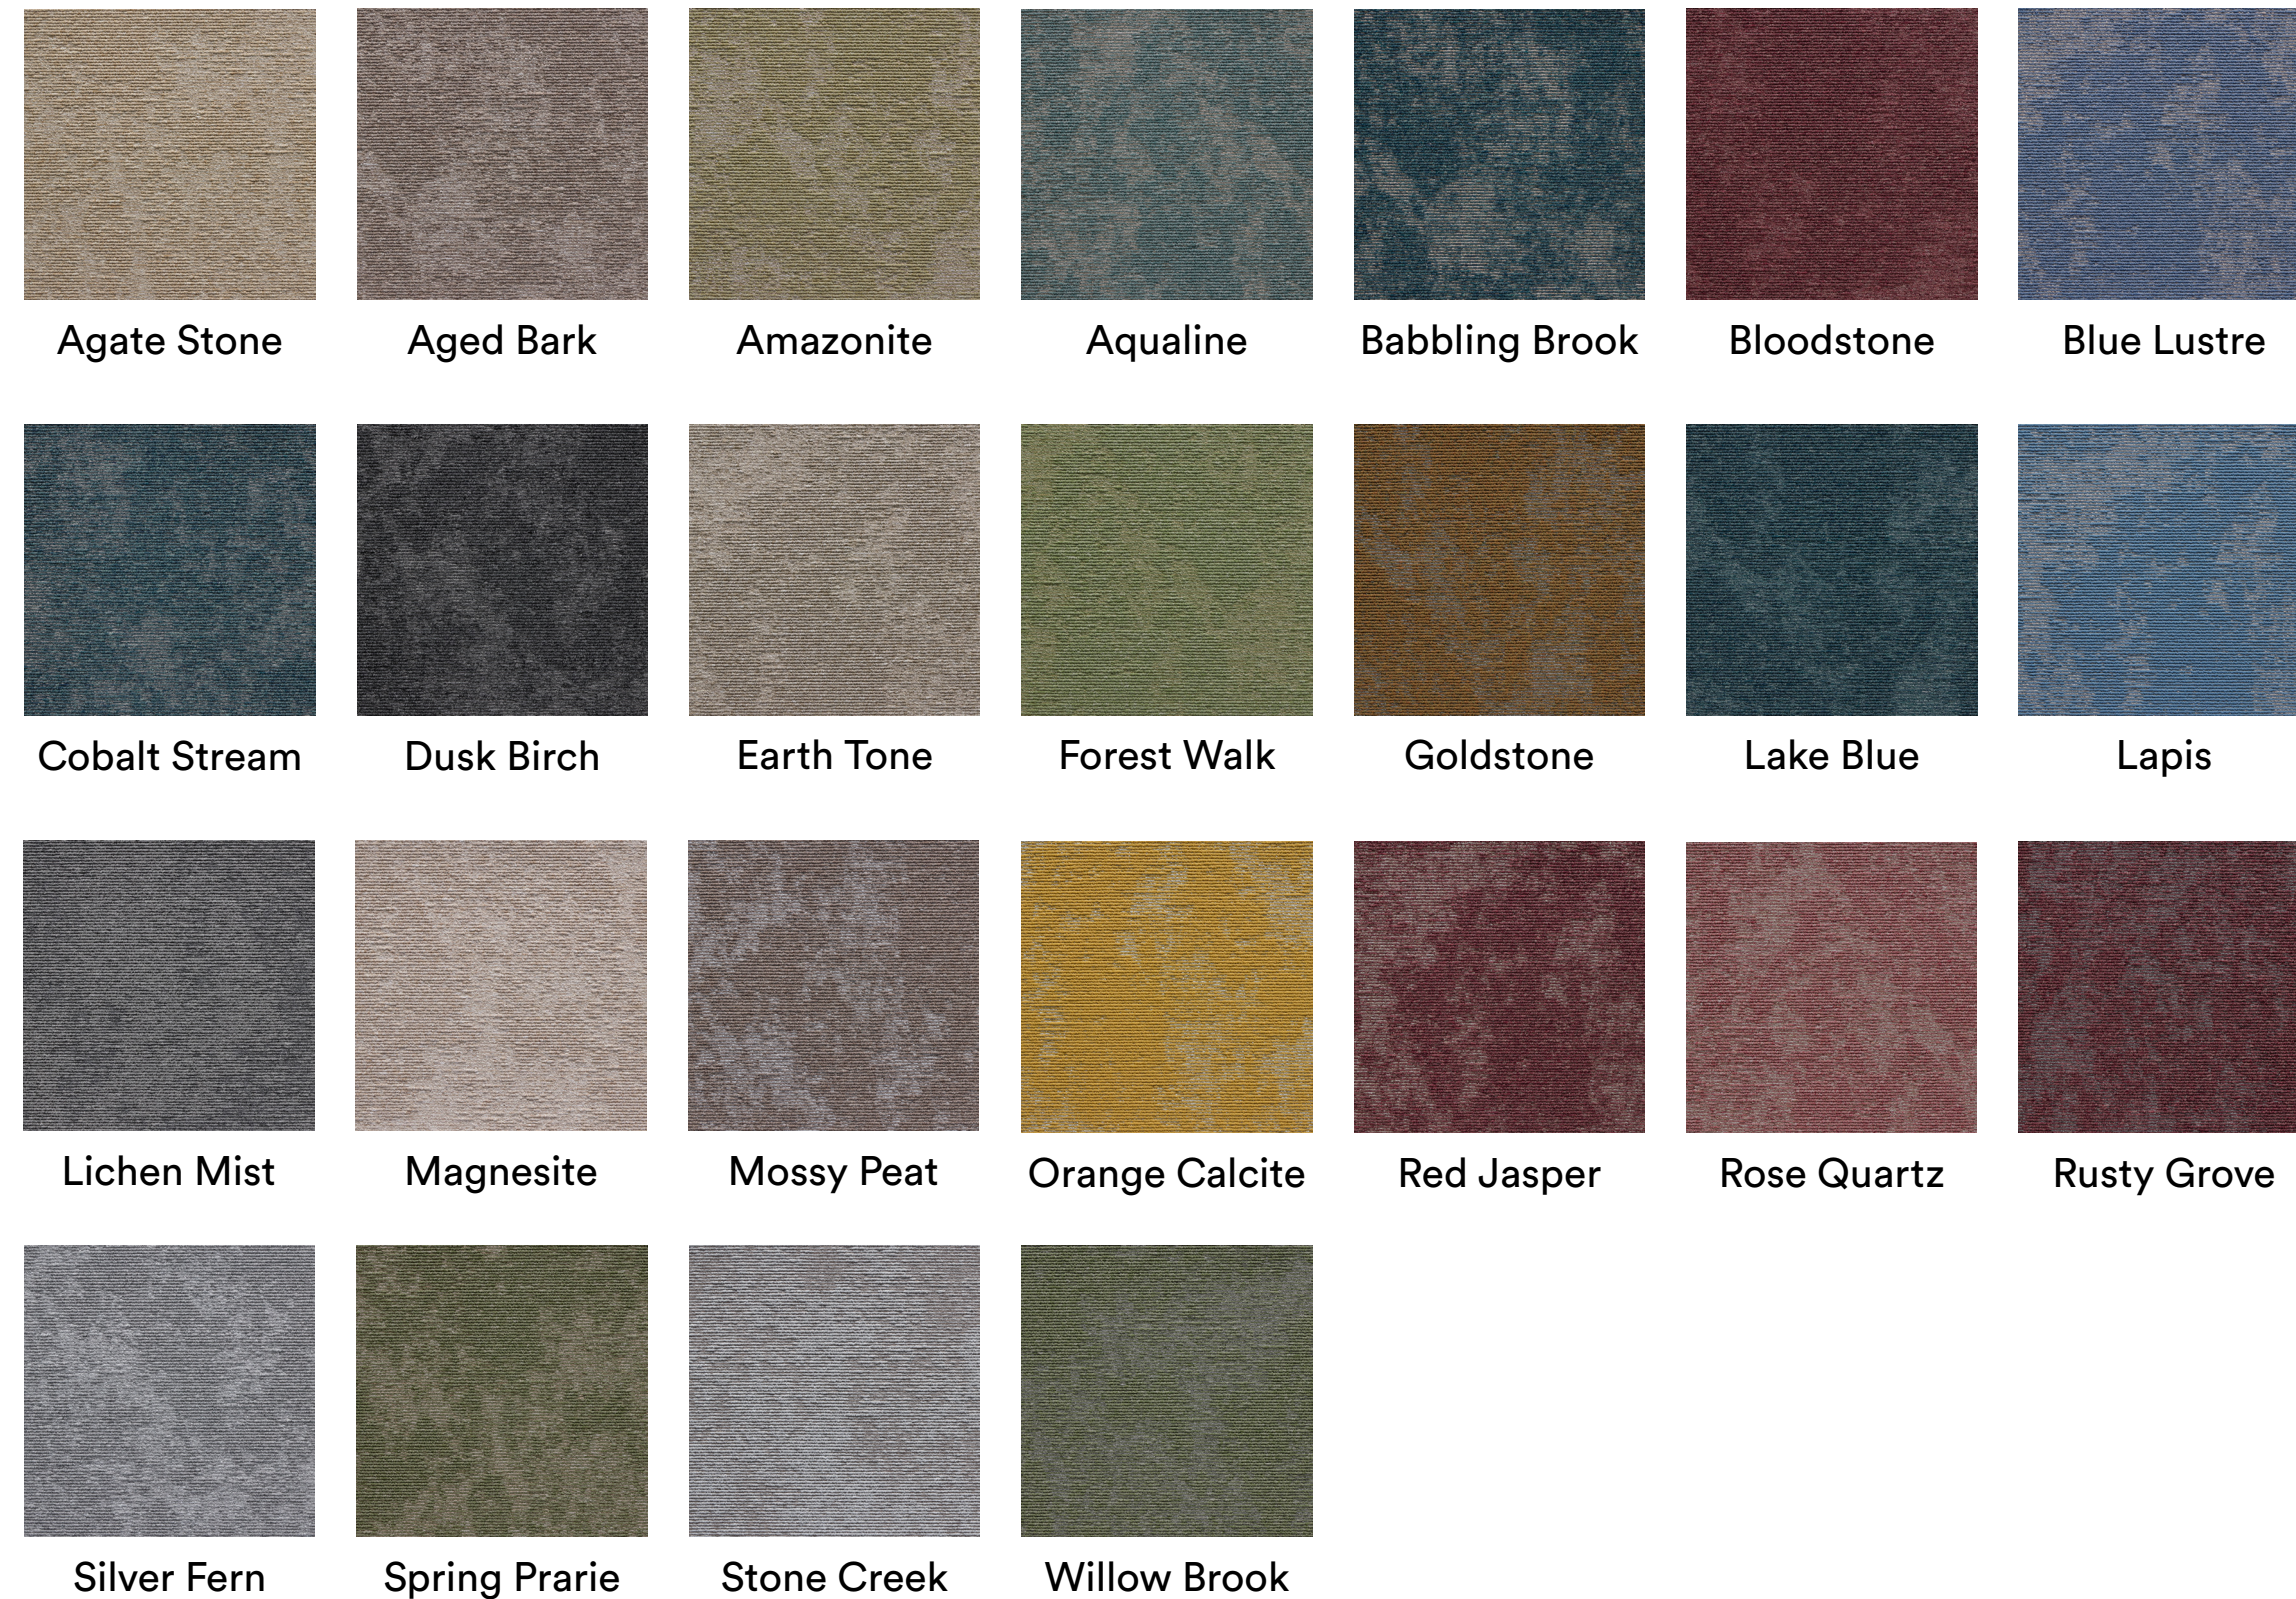

# Terranova

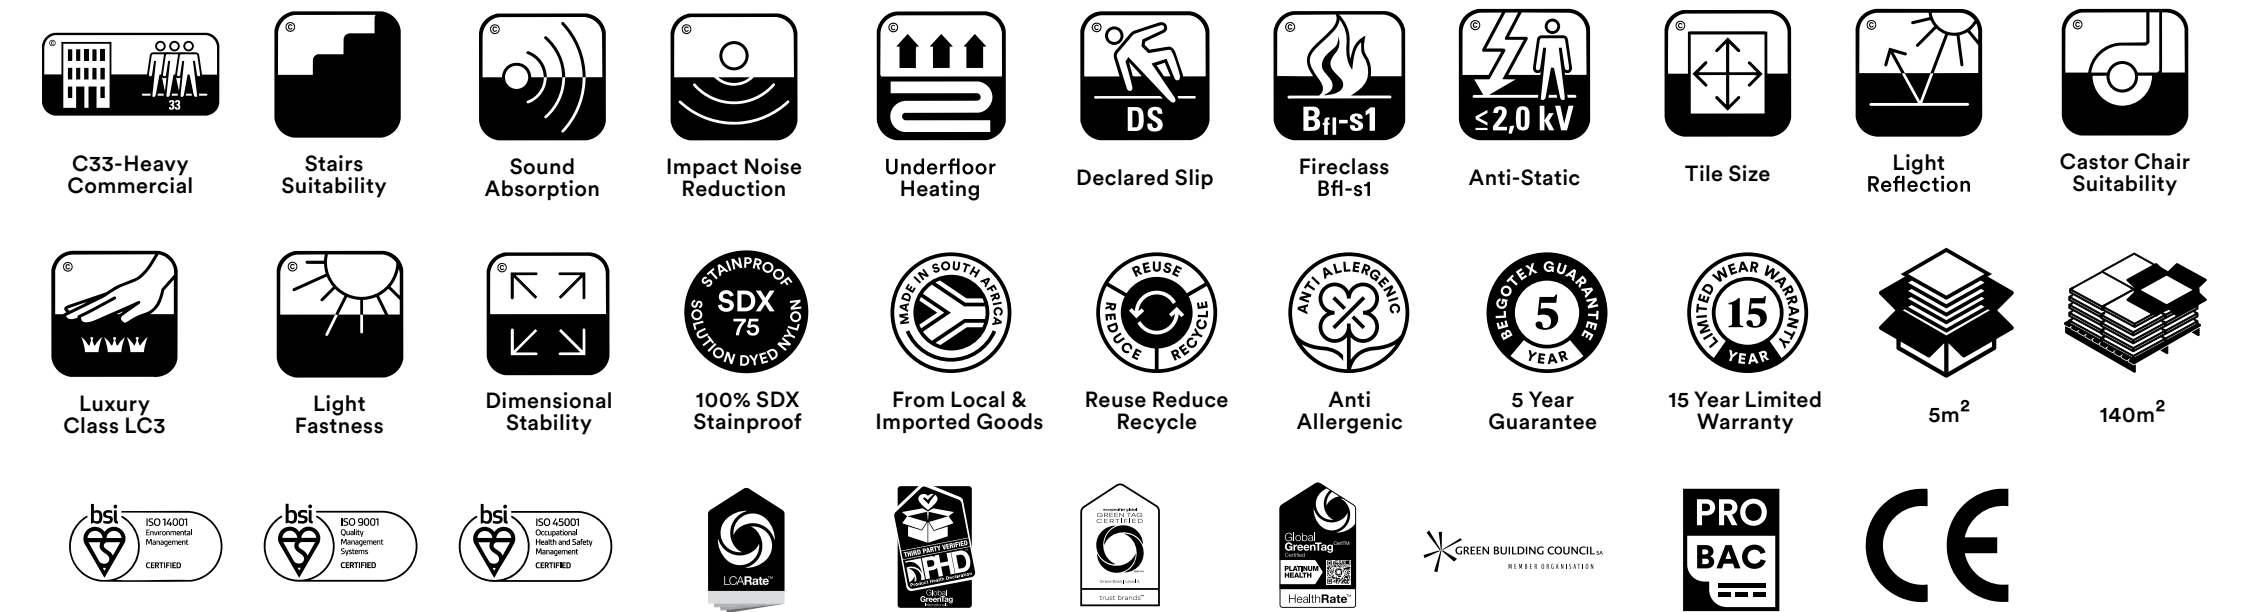

## Bill of Quantities

- Belgotex Terranova 50cm x 50cm Heavy Commercial 7.7mm to 8.8mm ProBac Tufted tiles are manufactured from 100% Stainproof SDX (Solution Dyed Nylon)
- This product is to be laid in accordance with the SANS 10186 fitting code of practice.
- Belgotex Terranova tiles to be installed in the following direction: Tessellation
- Belgotex recommends the use of carpet protector mats where castor wheels are used.
- 15-year warranty
- 5-year guarantee.
- Made in South Africa

**Note:** Belgotex offers customization of this product in colour, backing and size. Please contact a Belgotex representative for more information.

\*All product names and logos are trademarks of BELGOTEX FLOORCOVERINGS® (Pty) Ltd. © BELGOTEX FLOORCOVERINGS® (Pty) Ltd. All rights reserved. Warranty and guarantee to limitations and conditions. For details contact BELGOTEX FLOORCOVERINGS® (Pty) Ltd.

**Product Disclaimer:** Product characteristic may vary due to the nature of manufacturing. To combat colour variance do not install more than one dye lot in a single colour tile installation. Where different dye lots and products are mixed and matched then size variations could take place, and tiles might need to be altered during installation. If you are installing multiple colours in a random pattern, mixing dye lots together won't be a problem. Sample swatches have been cut from an overall design; therefore, the design and shades may vary. A difference in appearance from the pattern is likely, as the product is not intended to have a uniform appearance. During installation of this product there could be visible tile joins due to texture and design, this is not a manufacturing fault, tiles need to be moved around the in the installation.